

Flow enhancer influence on non-isothermal systems for heavy crude oil production

Influencia de un mejorador de flujo en la producción de crudo pesado en sistemas no isotérmicos

Edgardo J. Suarez-Dominguez¹, Josue Fco. Perez-Sanchez^{1,2*}, Arturo Palacio-Perez³,
Elena Izquierdo-Kulich⁴, Susana Gonzalez-Santana⁴

¹Facultad de Arquitectura, Diseño y Urbanismo, Centro Universitario Sur, Universidad Autónoma de Tamaulipas.

²Centro de Investigación en Petroquímica, Instituto Tecnológico de Ciudad Madero. Prol. Bahía del Aldair, Av. de las Bahías, Parque Industrial Tecnia, 86000, Altamira, Tamaulipas, México. *Correo electrónico: josue.perez@uat.edu.mx.

³Instituto de Ingeniería, Universidad Nacional Autónoma de México.

⁴Departamento de Química-Física, Facultad de Química, Universidad de La Habana.

*Corresponding author

Abstract

Production of heavy and extra-heavy crude oils generally entails high costs, especially in the winter season, due to heat losses. This work studies the effect of a flow enhancer (a chemical formulation based on biodiesel and oxidized biodiesel of soy oil) on the viscosity of heavy crude oil from different wells in Northern Mexico. The observed results indicate a non-linear decreasing behavior of viscosity concerning temperature and volume fraction of the viscosity reducer. It is also presented a theoretical model that predicts the flow increase that can be achieved using the enhancer in systems in which crude oil temperature is higher than the temperature of the environment. Results showed adequate correspondence between experimental and predicted data. It was found that the enhancer increases the volume of crude oil that can be processed without varying pressure gradient.

Keywords: Heavy crude oil; non-isothermic production systems; heat losses; viscosity prediction.

Resumen

La producción de crudo pesado conlleva, generalmente, altos costos asociados a la extracción y transporte, sobre todo en temporadas en las que existen pérdidas de calor en los sistemas empleados. En este trabajo, se estudia el efecto de un mejorador de flujo (formulación de biodiesel y biodiesel oxidado) en la viscosidad de crudo pesado del norte de México, y se desarrolla un modelo que predice el comportamiento del flujo en sistemas de temperatura variable. Los resultados muestran una buena correspondencia entre los datos predichos y los experimentales, observando un decremento no lineal de la viscosidad del crudo con respecto a la temperatura y la fracción en volumen del reductor. Se encontró, además, que el empleo del mejorador de flujo incrementa la producción de crudo sin aumentar el gradiente de presión en el sistema.

Palabras clave : Crudo pesado; sistemas de producción no isotérmicos; pérdidas de calor; predicción de la viscosidad.

Recibido: 18 de agosto de 2019

Aceptado: 15 de mayo de 2020

Publicado: 17 de junio de 2020

Como citar: Suarez-Dominguez, E. J., Perez-Sanchez, J. F., Palacio-Perez, A., Izquierdo-Kulich, E., & Gonzalez-Santana, S. (2020). Flow enhancer influence on non-isothermal systems for heavy crude oil production. *Acta Universitaria* 30, e2645. doi. <http://doi.org/10.15174/au.2020.2645>.

Introduction

Heavy crude oils have, in their composition, a considerable fraction of high molecular weight asphaltenes and paraffin molecules (Al-Qasim & Al-Dawsari, 2017; Ilyin *et al.*, 2016; Kumar, Kumar & Singh, 2017; Sama, Barrère-Mangote, Bouyssière, Giusti & Lobinski, 2017). These molecules interact with each other to form aggregates making a dispersed phase that, among other effects, manifests itself in high viscosity (Barnes, 2000; Berg, 2010; Cerbelaud, Laganapan, Ala-Nissila, Ferrando & Videcoq, 2017; Kontogeorgis & Kiil, 2016).

The high viscosity of heavy crude oil leads to an increase in transportation and extraction costs (Ghannam, Hasan, Abu-Jdayil & Esmail, 2012; Santos, Oliveira & Mansur, 2017). Although heating the oil is one of the ways to decrease viscosity, the implementation and operation of the heat transfer systems are associated with high investment and operating costs; therefore, this is not an efficient method in all cases. For this reason, other alternatives have been explored, such as the use of chemicals that act as viscosity reducers without affecting the chemical nature of the crude oil or the consequent refining operations (Ilyin *et al.*, 2016; Pérez-Sánchez, Alarcón-Montelongo, Díaz-Zavala, Palacio-Pérez & Suárez-Domínguez, 2017; Suárez *et al.*, 2016). The physical-chemical action mechanism of improvers depends on the chemical nature of its active ingredient and crude oil composition, as well as the processes that cause high viscosity.

The chemical employed in this work is an enhancer whose active ingredient is an epoxidized ester. Because its polarity, it is established that the enhancer fundamental action mechanism is based on the epoxidized ester-asphaltene molecular interaction, in such a way that the fraction that forms aggregates decreases (dispersed phase in the crude), with the consequent reduction of viscosity (Rogel *et al.*, 2017). Both crude oil composition and molecular interactions were analyzed to obtain a model that predicts the viscosity behavior concerning the concentration of the enhancer.

This work presents the results observed about the effect of temperature and enhancer concentration on the viscosity of two crude oils (A and B) from the North of Mexico. A mathematical model is presented to describe frictional pressure losses concerning the enhancer concentration in systems in which there exist heat losses through the walls of the pipeline.

Materials and methods

100 mL of each crude was mixed with a known amount of the flow enhancer corresponding to the next volume fractions: 0; 0.0049; 0.014; 0.024; and 0.03380. The behavior of the viscosity was determined in a temperature range between 15 °C and 60 °C with a Brookfield Viscometer, and the experimental results obtained are shown in figure 1. It can be observed that, for all cases, the viscosity decreases in a non-linear way. In contrast, for a fixed temperature, the viscosity decreases when the volume fraction of the enhancer is increased.

Under the hypothesis that the enhancer presence results in a reduction of the volume fraction of asphaltene, which is the dispersed phase in the crude oil, and that viscosity depends on the value of this fraction, it is *a priori* to establish the following model to determine the viscosity behavior for temperature and volume fraction of enhancer (Suárez-Domínguez, Pérez-Sánchez, Palacio-Pérez & Izquierdo-Kulich, 2018):

$$\mu = \left(\alpha_1 + \frac{\alpha_2}{T} + \frac{\alpha_3}{T^2} \right) (1 + \beta_1 m + \beta_2 m^2) \quad (1)$$

where μ is viscosity (Pa·s), T is the temperature (°C), α_n and β_n are parameters adjusted from experimental results, and m is the volume fraction of the enhancer. This hypothesis is supported by the fact that it has been observed that the modifiers of the asphaltenes properties tend to improve the fluidity of the heavy crudes (Guzmán, Ancheyta, Trejo & Rodríguez, 2017; Menapace *et al.*, 2018; Rogel *et al.*, 2017; Sun, Wang, Gu, Xu & Gong, 2017; Zendehboudi *et al.*, 2014).

For each crude, an adjustment of the model given by Equation (1) was performed using the Marquardt statistical method of non-linear regression, with 95% reliability, and using the STATGRAPHICS program. The results are shown in Table 1. In all cases, the estimation was stopped for the residuals sum convergence to adjust the models. The predicted graphs for each of the analyzed models are shown in figure 2, and the viscosity predicted results concerning the volume fraction of the enhancer, considering temperature as a parameter, are shown in figure 3.

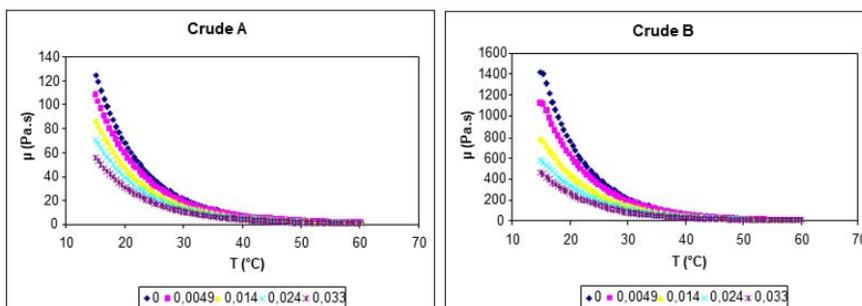


Figure 1. Behavior of viscosity μ (Pa·s) with respect to temperature T (°C) for different concentrations of enhancer expressed as volume fraction for each crude.
Source: Authors' own elaboration.

Table 1. Adjusted parameters (α_n and β_n), linear correlation factor (R^2), and the mean absolute percentage error (MAPE) for each crude.

Crude	α_1	α_2	α_3	β_1	β_2	R^2	MAPE
A	-1.6559	-513.28	37087	-22.495	199.88	99.78	0.77
B	-7.9987	-7498.5	4.4868x105	-34.961	461.07	99.62	10.53

Source: Authors' own elaboration.

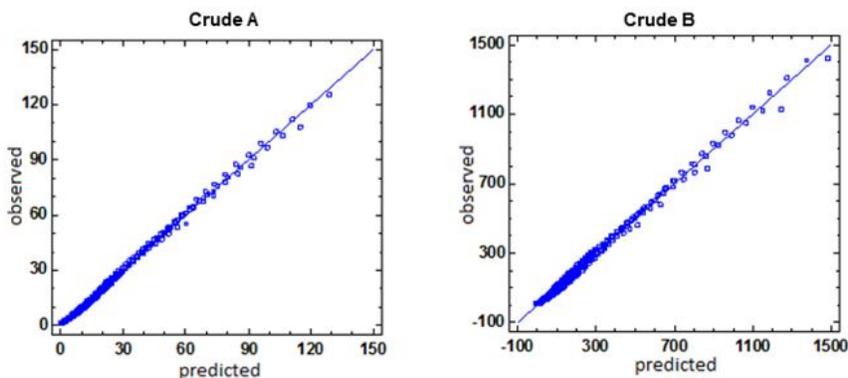


Figure 2. Comparison between experimental and predicted viscosity results.
Source: Authors' own elaboration.

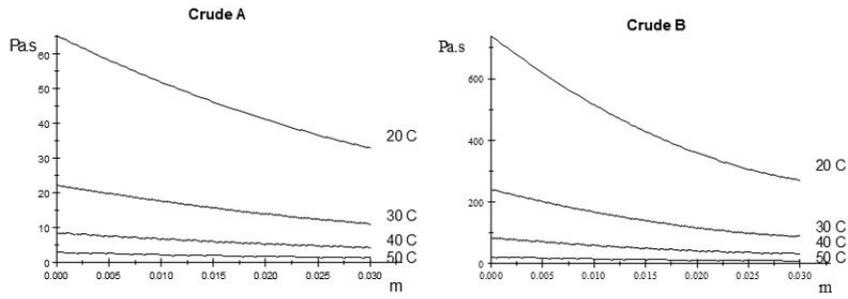


Figure 3. Predicted viscosity behavior (Pa.s) considering enhancer volume fraction (m) against temperature.
Source: Authors' elaboration.

Equation (2) represents the pressure gradient concerning the tube length for the laminar regime of a Newtonian and incompressible fluid (Bird, Stewart & Lightfoot, 2002):

$$-\frac{dp}{dz} = Q_0 \frac{128 \mu}{\pi D^4} \quad (2)$$

where Q_0 is the flow ($m^3 \cdot s^{-1}$), μ is the viscosity (Pa.s), D is the diameter of the tube (m), p is the pressure (Pa), and z represents the length of the tube (m). Equation (2) is valid for isothermal systems and systems in which there are temperature changes along the length z and work with the average temperature of the fluid concerning the flow area. In this case, the viscosity is a function of the temperature gradient against the length of the tube. This gradient is assumed by:

$$T = T_2 + (T_1 - T_2) \exp\left(-\frac{10z}{H}\right) \quad (3)$$

where T_1 and T_2 are the fluid temperatures at the entrance and distance H from the inlet, respectively. The value of H depends on the heat losses through the tube, the temperature at the exit of the well, and the ambient temperature (Suárez *et al.*, 2016). For the conditions $T_1 > T_2$ and $H \leq L$, where L is the total length of the horizontal tube, and substituting Equation (1) and (3) into Equation (2) (where the overall flow is the mixture of crude plus enhancer), it is obtained the differential equation that describes the behavior of the pressure concerning the length of the tube:

$$-\frac{dp}{dz} = \sigma \left(\alpha_1 + \frac{\alpha_2}{T_2 + (T_1 - T_2) \exp\left(-\frac{10z}{H}\right)} + \frac{\alpha_3}{T_2 + (T_1 - T_2) \exp\left(-\frac{10z}{H}\right)^2} \right) \quad (4)$$

where

$$\sigma = Q_0(1 + m) \frac{128}{\pi D^4} (1 + \beta_1 m + \beta_2 m^2) \quad (5)$$

The exact analytical solution of Equation 4 is

$$P = \frac{1}{20T_2} \left(20P_0T_2 + 2H\sigma\alpha_2 \ln \frac{T_1}{T_1 - T_2} + H\sigma\alpha_3 \ln \frac{T_1}{T_1 - T_2} \right) - z\sigma\alpha_1 - z\sigma \frac{\alpha_2}{T_2} - z\sigma \frac{\alpha_3}{T_2} - \frac{1}{10} H\sigma \frac{\alpha_2}{T_2} \ln \frac{1}{T_1 - T_2} \left(T_2 + \frac{T_1}{e^{10(\frac{1}{H}z)}} - \frac{T_2}{e^{10(\frac{1}{H}z)}} \right) - \frac{1}{20} H\sigma \frac{\alpha_3}{T_2} \ln \frac{1}{T_1 - T_2} \left(T_2 + \frac{T_1}{e^{20(\frac{1}{H}z)}} - \frac{T_2}{e^{20(\frac{1}{H}z)}} \right) \quad (6)$$

with the next definition for pressure losses

$$\Delta P = P_0 - P \quad (7)$$

After mathematical treatment, the pressure losses for a tube of total length L are given by:

$$\Delta P_L = \sigma \left((\alpha_2 + \alpha_3 + \alpha_1 T_2) \frac{L}{T_2} + \frac{H}{20T_2} \lambda \right) \quad (8)$$

where

$$\lambda = \left(2\alpha_2 \left(\ln \frac{(T_1 - T_2 + T_2 e^{\frac{10}{H}L})}{T_1 e^{\frac{10}{H}L}} \right) + \alpha_3 \left(\ln \frac{(T_1 - T_2 + T_2 e^{\frac{20}{H}L})}{T_1 e^{\frac{20}{H}L}} \right) \right) \quad (9)$$

The behavior of the quotient (q) between the crude flow (Q_0) and the pressure losses (ΔP) (kPa) for a tube length (L) is determined from Equation 8 and 9 and is given by:

$$q = \frac{0.2D^4}{(1+m)(1+\beta_1 m + \beta_2 m^2) \left((\alpha_2 + \alpha_3 + \alpha_1 T_2) \frac{L}{T_2} + \frac{H}{20T_2} \lambda \right)} \times 10^7 \frac{m^3}{d} (\text{kPa})^{-1} \quad (10)$$

Results

The effect of temperature gradient and flow enhancer concentration on the crude oil production volume was obtained through Equation (10).

For the predictions, it was considered that crude oil is transported by a 10-inch diameter tube and the viscosity values represented by the constants in table 1. The crude oil inlet temperature was considered for all cases equal to 60 °C, while the value of the ambient temperature was set at 25 °C. Figure 4 shows the quotient (q) between the crude flow and the pressure losses for a length (L) equal to 1000 m from the input and the value of the distance (H), which represents the distance from the inlet for which the crude oil temperature is equal to the ambient temperature. Calculations were performed considering a volume fraction of viscosity reducer (m) equal to 0 (dashed line) and 0.01 (solid line).

As mentioned, H depends on the temperature difference between ambient and crude oil, and the heat coefficient transfer through the tube wall, which depends on whether any insulating material has been placed to reduce heat losses. In this sense, an increase of this distance is related to a smaller loss of heat to the outside. The model predicts that a higher H value leads to an increase in the flow of crude oil for the same pressure drop. On the other hand, note that for both crude oils, the injection of the viscosity reducer leads to an increase in the flow value, which is the expected result. The predicted results consider that there is a mixture between the chemical and the crude oil. However, these fluids are transported under the laminar regime due to their high viscosity. Therefore, two-phase flow is formed whose pattern will depend on the properties of liquids and injection form.

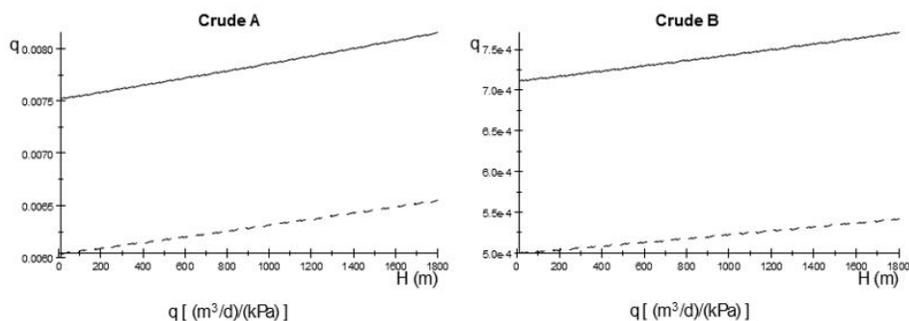


Figure 4. The behavior of the quotient (q) between crude oil flow (m^3d^{-1}) and pressure drop (kPa) at $L = 1000$ m for distance (H) (m) with an enhancer volume fraction m of 0 (dashed line) and 0.01 (solid line).
Source: Authors' own elaboration.

Conclusions

An experimental study was carried out to analyze the influence of a flow enhancer on the viscosity of heavy crude oil, for which two different crude oils from the Northern region of Mexico were studied. The viscosity behavior of the crude oil concerning temperature was measured for different values of the volume fraction of viscosity reducer, which is mechanically mixed with the crude oil. These results were adjusted by statistical techniques of non-linear regression, with an adequate correspondence between the results observed and those predicted by the adjusted model. By following the influence of the enhancer concentration on crude oil viscosity, a mathematical model is proposed to predict the behavior of the relation between the crude oil flow and pressure drop to a specified length in a hypothetical transport system in which there are losses of heat. For this case, it was obtained that the mixture of crude with enhancer increases the volume of oil achieved at the same value of the pressure gradient.

The results support the hypothesis that viscosity decrease is due to the molecular interactions between asphaltenes and epoxidized ester, which is the active principle of the enhancer. Since both are polar molecules, while the rest of the crude components are non-polar, such interaction leads to a decrease in the fraction of asphaltenes that are in a dispersed phase.

It should be emphasized that the model considers the transport in laminar regime due to their high viscosity with a two-phase flow pattern that depends on the properties of both fluids and the form of injection. In this case, a different mathematical model to predict the behavior of the system must be established.

Acknowledgments

This research was supported by CONACYT-SENER-Hidrocarburos under grant number 282278.

References

- Al-Qasim, A., & Al-Dawsari, M. A. (2017). Comparison study of asphaltene precipitation models using UTCOMP, CMG/GEM and ECLIPSE simulators. In *Society of Petroleum Engineers Oil and Gas India Conference and Exhibition*. doi: <https://doi.org/10.2118/185370-MS>
- Barnes, H. A. (2000). *A handbook of elementary rheology*. Wirral, England: Cambrian Printers. [ftp://nozdr.ru/biblio/kolxoz/P/PC/PCfm/Barnes%20H.A.%20Handbook%20of%20elementary%20rheology%20\(U.W.ales,%202000\)\(ISBN%200953803201\)\(210s\)_PCfm_.pdf](ftp://nozdr.ru/biblio/kolxoz/P/PC/PCfm/Barnes%20H.A.%20Handbook%20of%20elementary%20rheology%20(U.W.ales,%202000)(ISBN%200953803201)(210s)_PCfm_.pdf)
- Berg, J. C. (2010). *An introduction to interfaces and colloids. The Bridge to Nanoscience*. USA: World Scientific. doi: <https://doi.org/10.1142/7579>
- Bird, R. B., Stewart, W. E., & Lightfoot, E. N. (2002). *Transport phenomena*. USA: John Wiley & Sons.
- Cerbelaud, M., Laganapan, A. M., Ala-Nissila, T., Ferrando, R., & Videcoq, A. (2017). Shear viscosity in hard-sphere and adhesive colloidal suspensions with reverse non-equilibrium molecular dynamics. *Soft Matter*, 13(21), 3909-3917. doi: <https://doi.org/10.1039/C7SM00441A>
- Ghannam, M. T., Hasan, S. W., Abu-Jdayil, B., & Esmail, N. (2012). Rheological properties of heavy and light crude oil mixtures for improving flowability. *Journal of Petroleum Science and Engineering*, 81, 122-128. doi: <https://doi.org/10.1016/j.petrol.2011.12.024>
- Guzmán, R., Ancheyta, J., Trejo, F., & Rodríguez, S. (2017). Methods for determining asphaltene stability in crude oils. *Fuel*, 188, 530-543. doi: <https://doi.org/10.1016/j.fuel.2016.10.012>
- Ilyin, S., Arinina, M., Polyakova, M., Bondarenko, G., Konstantinov, I., Kulichikhin, V., & Malkin, A. (2016). Asphaltenes in heavy crude oil: Designation, precipitation, solutions, and effects on viscosity. *Journal of Petroleum Science and Engineering*, 147, 211-217. doi: <https://doi.org/10.1016/j.petrol.2016.06.020>
- Kontogeorgis, G. M., & Kiil, S. (2016). *Introduction to applied colloid and surface chemistry*. USA: Wiley. doi: <https://doi.org/10.1002/9781118881194>
- Kumar, P., Kumar, S., & Singh, J. (2017). Rheological and computational analysis of crude oil transportation. *International Journal of Mechanical and Mechatronics Engineering*, 11(2), 418-421. doi: <https://doi.org/10.5281/zenodo.1129748>
- Menapace, I., Cucalon, L. G., Kaseer, F., Arámbula-Mercado, E., Martin, A. E., Masad, E., & King, G. (2018). Effect of recycling agents in recycled asphalt binders observed with microstructural and rheological tests. *Construction and Building Materials*, 158, 61-74. doi: <https://doi.org/10.1016/j.conbuildmat.2017.10.017>
- Pérez-Sánchez, J. F., Alarcón-Montelongo, I. S., Díaz-Zavala, N. P., Palacio-Pérez, A., & Suárez-Domínguez, E. J. (2017). Effect of a viscosity bio-reducer in crude oil performance by nuclear magnetic resonance spectroscopy. *Global Journal of Engineering Science and Research Management*, 4(9), 74-81. doi: <https://doi.org/10.5281/zenodo.891139>
- Rogel, E., Vien, J., Morazan, H., Lopez-Linares, F., Lang, J., Benson, I., Carbognani, L. A., & Ovalles, C. (2017). Subsurface upgrading of heavy oils via solvent deasphalting using asphaltene precipitants. Preparative separations and mechanism of asphaltene precipitation using benzoyl peroxide as precipitant. *Energy and Fuels*, 31(9), 9213-9222. doi: <https://doi.org/10.1021/acs.energyfuels.7b01588>
- Sama, S. G., Barrère-Mangote, C., Bouyssière, B., Giusti, P., & Lobinski, R. (2017). Recent trends in element speciation analysis of crude oils and heavy petroleum fractions. *TrAC Trends in Analytical Chemistry*, 104, 6976. doi: <https://doi.org/10.1016/j.trac.2017.10.014>
- Santos, I. C. V. M., Oliveira, P. F., & Mansur, C. R. E. (2017). Factors that affect crude oil viscosity and techniques to reduce it: A review. *Brazilian Journal of Petroleum and Gas*, 11(2), 115-130. doi: <https://doi.org/10.5419/bjpg2017-0010>
- Suárez, E. J., Solorio F., Chávez, A. E., Izquierdo, E., Rodríguez, A., & Palacio, A. (2016). Effect of a viscosity reducer in a liquid-liquid flow: II unsteady state annular model in a pipeline. *Revista Mexicana de Ingeniería Química*, 15(3), 903-911. <http://rmiq.org/iqfvp/Pdfs/Vol.%2015,%20No.%203/Fen1/RMIQTemplate.pdf>

- Suárez-Domínguez, E. J., Pérez-Sánchez, J. F., Palacio-Pérez, A., & Izquierdo-Kulich, E. (2018). New mixing rule for analysis of the influence of a formulation on an extra-heavy oil crude viscosity. *Revista Mexicana de Ingeniería Química*, 17(1), 99-106. doi: 10.24275/10.24275/uam/izt/dcbi/revmexingquim/2018v17n1/Suarez
- Sun, W., Wang, W., Gu, Y., Xu, X., & Gong, J. (2017). Study on the wax/asphaltene aggregation with diffusion limited aggregation model. *Fuel*, 191, 106-113. doi: <https://doi.org/10.1016/j.fuel.2016.11.063>
- Zendehboudi, S., Shafiei, A., Bahadori, A., James, L. A., Elkamel, A., & Lohi, A. (2014) Asphaltene precipitation and deposition in oil reservoirs: Technical aspects, experimental and hybrid neural network predictive tools. *Chemical Engineering Research and Design*, 92(5), 857-875. doi: <https://doi.org/10.1016/j.cherd.2013.08.001>